



TeleControl Serie 21 , 2 Botones , 2 Velocidades, Alcance 100Mts


Características Esenciales

- 1 Años de Garantía, Servicio y Atención al Cliente en Mexico

Especificaciones Técnicas

Channels	2	Control Speed	2 Speed
Transmitter Emergency Stop	No	Codigo FCC	OFNF21
Fuente de Alimentación del Transmisor	2 AA batteries	Distancia de Control	Up to 180 ft
Código de Seguridad	32 bits (4.3 billion)	Potencia del Transmisor	≤10dBm
Rango de Frecuencia	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz	Rango de temperatura de Trabajo	-40 ~ 185 °F / -40 ~ 85°C
Normas	FCC and OSHA standard 1910.179	Garantía	1 Year

F21-2S/2D TRANSMITTER
Small, economical, convenient

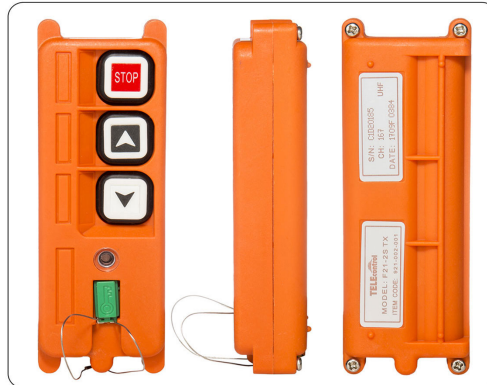

MODEL: F21-2S-TX
ITEM CODE: 921-002-001
Dimensions: 132 x 45 x 28 mm
Weight: 98g (without batteries)

- Product Features:**
- Two single/double speed buttons, one "STOP"
 - 6 control contactors.
 - With battery voltage warning device, the power supply is cut off during low power
 - Safety key switch to prevent from unauthorized user.
 - Program the button function by computer interface.
 - Up/Down can be programmed to interlock or non-interlock.
 - The spare button can be programmed to start, toggle or normal, etc.

- Standard Configuration:**
- One transmitter (with hanging belt)
 - One dust bag
 - One receiver
 - Receiver with 1.6 meter cable
 - Battery: One pair
 - One receiver antenna.
 - Operation and maintenance manual.

Safety features:
Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certifies.



Peso & Dimensiones

Peso Total 2 lbs / 1 Kg

Detalles del Empaque

Paquete 1 Peso Neto 2 lbs / 1 Kg

Paquete 1 Peso Bruto 2 lbs / 1 Kg

Paquete 1 Profundidad 3 in / 8 cm

Paquete 1 Ancho 7 in / 18 cm

Paquete 1 Altura 9 in / 23 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso