



## TeleControl Serie 21 , 2 Botones , 1 Velocidad, Alcance 100Mts 12V DC

### Características Esenciales


- 1 Años de Garantía, Servicio y Atención al Cliente en Mexico

## Especificaciones Técnicas

<b>Transmitter Emergency Stop</b>	No	<b>Channels</b>	2
<b>Control Speed</b>	1 Speed	<b>Codigo FCC</b>	2ASYP-VR8
<b>Fuente de Alimentación del Transmisor</b>	2 AA batteries	<b>Distancia de Control</b>	Up to 180 ft
<b>Código de Seguridad</b>	32 bits (4.3 billion)	<b>Potencia del Transmisor</b>	≤10dBm
<b>Rango de Frecuencia</b>	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz	<b>Rango de temperatura de Trabajo</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Normas</b>	FCC and OSHA standard 1910.179	<b>Garantía</b>	1 Year

## F21-2S/2D TRANSMITTER

Small, economical, convenient

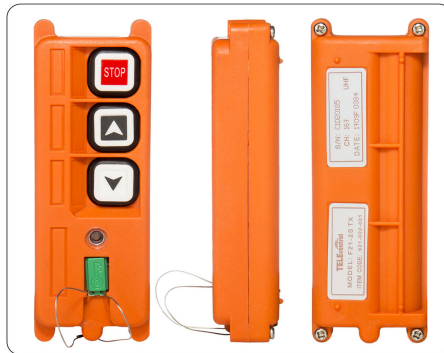

**MODEL:** F21-2S-TX  
**ITEM CODE:** 921-002-001  
**Dimensions:** 132 x 45 x 28 mm  
**Weight:** 98g (without batteries)

**Product Features:**

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

**Transmitter Parameters: F21-2S**

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Transmitter power	< 10dBm
Transmitter power supply	2 AA batteries
Safety code	32 bits (4.3 billion)
Temperature range	-40° C ~+ 85° C
Control distance	Approx 60m (100 meters is customized)

**Standard Configuration:**

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

**Safety features:**

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificated.



## F21-2S/2D RECEIVER



**MODEL:** F21-2SRXC  
**ITEM CODE:** 921-103-011  
**Dimensions:** 88 x 92 x 62 mm  
**Weight:** 320g



**Transmitter Parameters: F21-RXC**

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Receiver sensitivity	-110dBm
Receiver power supply	18~65V AC/DC, 65~440V AC/DC (optional)
Output contactor capacity	8A sealed relay output (with AC 250V/10A relays, 10A fuse)
Control distance	Approx 60m (100 meters is customized)
Safety code	32 bits (4.3 billion)
Temperature range	-40° C ~+ 85° C



## Peso & Dimensiones

**Peso Total** 1 lbs / 1 Kg

## Detalles del Empaque

**Paquete 1 Peso Neto** 1 lbs / 1 Kg

**Paquete 1 Peso Bruto** 1 lbs / 1 Kg

**Paquete 1 Profundidad** 1 in / 3 cm

**Paquete 1 Ancho** 2 in / 6 cm

**Paquete 1 Altura** 5 in / 13 cm

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso