



TeleControl Serie 21 , 2 Botones , 1 Velocidad, Alcance 100Mts 18 a 65V AC DC

Características Esenciales


- 1 Años de Garantía, Servicio y Atención al Cliente en Mexico

Especificaciones Técnicas

Channels	2	Control Speed	1 Speed
Transmitter Emergency Stop	No	Codigo FCC	OFNF21
Fuente de Alimentación del Transmisor	2 AA batteries	Distancia de Control	Up to 180 ft
Código de Seguridad	32 bits (4.3 billion)	Potencia del Transmisor	≤10dBm
Rango de Frecuencia	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz	Rango de temperatura de Trabajo	-40 ~ 185 °F / -40 ~ 85°C
Normas	FCC and OSHA standard 1910.179	Garantía	1 Year

F21-2S/2D TRANSMITTER

Small, economical, convenient

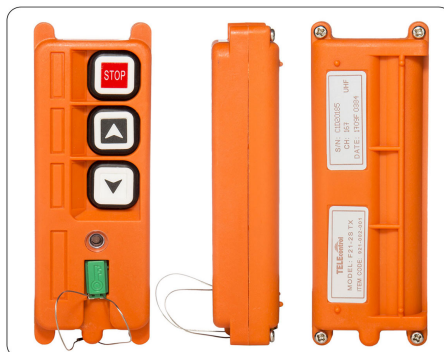

MODEL: F21-2S-TX
ITEM CODE: 921-002-001
Dimensions: 132 x 45 x 28 mm
Weight: 98g (without batteries)

Product Features:

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

Transmitter Parameters: F21-2S

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Transmitter power	< 10dBm
Transmitter power supply	2 AA batteries
Safety code	32 bits (4.3 billion)
Temperature range	-40° C ~+ 85° C
Control distance	Approx 60m (100 meters is customized)

Standard Configuration:

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

Safety features:

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificated.



F21-2S/2D RECEIVER

MODEL: F21-2SRXC
ITEM CODE: 921-103-011
Dimensions: 88 x 92 x 62 mm
Weight: 320g



Transmitter Parameters: F21-RXC

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Receiver sensitivity	-110dBm
Receiver power supply	18~65V AC/DC, 65~440V AC/DC (optional)
Output contactor capacity	8A sealed relay output (with AC 250V/10A relays, 10A fuse)
Control distance	Approx 60m (100 meters is customized)
Safety code	32 bits (4.3 billion)
Temperature range	-40° C ~+ 85° C



Peso & Dimensiones

Peso Total 1 lbs / 1 Kg

Detalles del Empaque

Paquete 1 Peso Neto 1 lbs / 1 Kg

Paquete 1 Peso Bruto 1 lbs / 1 Kg

Paquete 1 Profundidad 3 in / 8 cm

Paquete 1 Ancho 7 in / 18 cm

Paquete 1 Altura 9 in / 23 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso