

## TeleControl Serie 21 , 6 Botones Alcance 100Mts

### Características Esenciales

- 1 Años de Garantía, Servicio y Atención al Cliente en Mexico



## Especificaciones Técnicas

<b>Channels</b>	6	<b>Control Speed</b>	1 Speed
<b>Transmitter Emergency Stop</b>	Yes	<b>Codigo FCC</b>	OFNF21
<b>Fuente de Alimentación del Transmisor</b>	2 AA batteries	<b>Distancia de Control</b>	Up to 180 ft
<b>Código de Seguridad</b>	32 bits (4.3 billion)	<b>Potencia del Transmisor</b>	≤10dBm
<b>Rango de Frecuencia</b>	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz	<b>Rango de temperatura de Trabajo</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Normas</b>	FCC and OSHA standard 1910.179	<b>Garantía</b>	1 Year



**MODEL: F21-E2**  
**ITEM CODE: 921-006-002**  
**Dimensions: 156 x 61 x 51 mm**  
**Weight: 255g (without batteries)**

- Product Features:**
- 8 operation buttons, 6 single-speed buttons and "STOP"
  - 8 control contactors.
  - With battery voltage warning device, the power supply is cut off during low power.
  - Program the button function by computer interface.
  - Up/Down, East/West, North/South can be programmed to interlock or non-interlock.
  - The spare button can be programmed to start, toggle or normal, etc.

- Standard Configuration:**
- One transmitter (with hanging belt)
  - One dust bag
  - One receiver
  - Receiver with 1.6 meter cable
  - Battery: One pair
  - Operation and maintenance manual.


**Transmitter Parameters: F21-TX**

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Transmitter power	< 10dBm
Transmitter power supply	2 AA batteries
Safety code	32 bits (4.3 billion)
Temperature range	-40° C → + 85° C
Control distance	Approx 100m (200 meters is customized)

- Standard Configuration:**
1. Unique 32 bits ID Code
  2. Hamming code
  3. Enhanced watch-dog circuit
  4. With FCC and CE certificate



**Start protection circuit**  
 Each system has a dedicated testing circuit. Before the system starts, the transmitting system tests all switch contacts and receiving system tests relays. Only if both procedures are passed the whole system starts working.

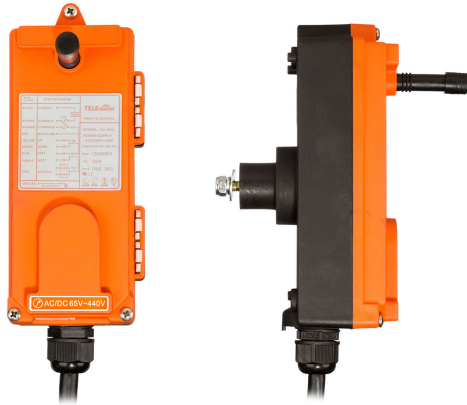


**MODEL: F21-RXC**  
**ITEM CODE: 921-100-112**  
**Dimensions: 205 x 86 x 80 mm**  
**Weight: 620 g**



**Transmitter Parameters: F21-TX**

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310~331MHz; UHF: 425~446MHz
Receiver sensitivity	- 110dBm
Receiver power supply	18~65V AC/DC, 65~440V AC/DC (optional)
Output contactor capacity	8A sealed relay output (with AC 250V/10A relays, 10A fuse)
Control distance	Approx 100m (200 meters is customized)
Safety code	32 bits (4.3 billion)
Temperature range	-40° C → + 85° C



## Peso & Dimensiones

**Peso Total** 4 lbs / 2 Kg

## Detalles del Empaque

**Paquete 1 Peso Neto** 5 lbs / 3 Kg

**Paquete 1 Peso Bruto** 4 lbs / 2 Kg

**Paquete 1 Profundidad** 12 in / 31 cm

**Paquete 1 Ancho** 8 in / 21 cm

**Paquete 1 Altura** 13 in / 34 cm

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso