




Optidrive P2 VFD 50 HP, 72 A, 380~480 V, 3PH with EMC Filter and TFT D

Input Ratings Supply Voltage 380-480 V Input Phases 3 Supply Current Continuous 76.4 A Supply Fuse or MCB (Type B) 100 A Output Ratings Motor Output Rating 37 kW (50 HP) Output Voltage 0 - Supply Voltage Output Current 72 A Cable Information Max Supply Cable Size 35 mm² (0.05 sq in) Max Motor Cable Size 35 mm² (0.05 sq in) Max Motor Cable Length 100 m (328 ft) Factory Build Options EMC Filter Internal EMC Brake Transistor Internal Enclosure IP20 Display TFT Display PCB Coating Standard

Especificaciones Técnicas

Fases de entrada	3	Voltaje de Suministro	380 - 480 V
Corriente de Suministro	76.4VDC	Fusible de suministro o MCB	Type B 100A
Clasificación de voltaje de salida	37kW	Corriente de Salida	72 A
Diametro Maximo de cable de suministro	0.05 sq in	Diametro maximo del cable del motor	0.05 sq in
Largo maximo del cable del motor	328 ft		

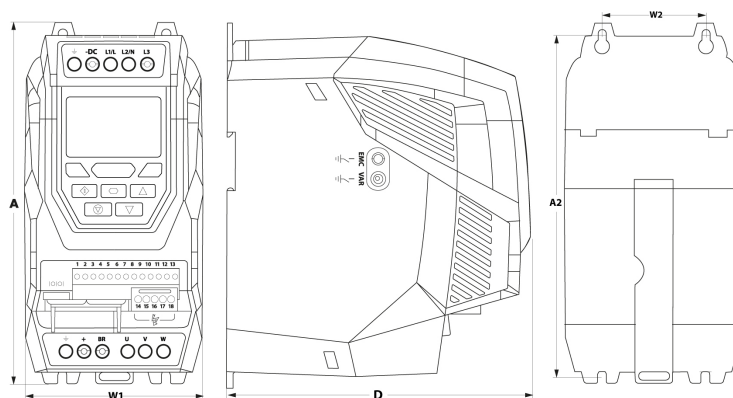

Peso & Dimensiones

Peso Total	45 lbs / 21 Kg
Paquete 1 Peso Neto	3.97 lbs / 2 Kg
Paquete 1 Peso Bruto	45 lbs / 21 Kg
Paquete 1 Profundidad	26 in / 67 cm
Paquete 1 Ancho	14 in / 36 cm
Paquete 1 Altura	14 in / 36 cm

Detalles del Empaque