




## Tecle Cadena Manual 3 Tons Antiexplosion ATEX made in Japan

### Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Mexico

## Especificaciones Técnicas

<b>Prueba de Carga</b>	150% [Rated Load / Capacidad Nominal]	<b>Normas</b>	ASME B30.16 / B30.17 / ATEX Directive
<b>Garantía</b>	3 Year		

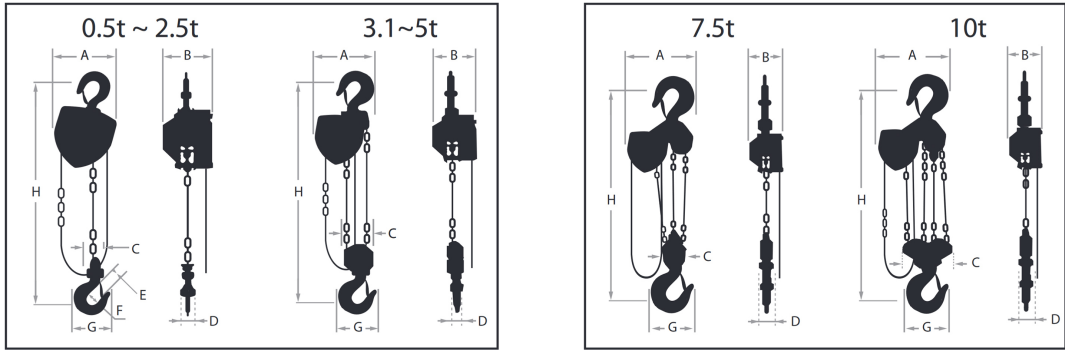

SPECIFICATIONS - PWEX H100 SPARK RESISTANT SERIES, HOOK MOUNT											
Model	Max working load (lbs)	Max working load (mt)	Standard Lift (ft)	Manufacturer's Test Load	Headroom (in) "H"	Headroom (in) Lug Mount to Trolley	Hand Effort to Lift Full Working Load (lbf)	Load Chain		Hand Chain	Net Weight (lbs)
								Dia. X Pitch (mm)	No. of Falls	Dia. X Pitch (mm)	
PWEX-H100-05	1100	0.5	10	150% x Max. working load	10.83	11.7	59.5	5 x 15	1	5 x 23.5	22
PWEX-H100-1	2200	1.0	10		11.81	12.5	69.5	6.3 x 19			27
PWEX-H100-2	4400	2.0	10		14.77	15.8	88.2	8 x 24			46
PWEX-H100-3	6800	3.1	10	125% x Max. working load	20.87	20.5	104.7	7.1 x 21	2	5 x 23.5	53
PWEX-H100-5	11000	5.0	10		24.1	24.8	105.8	9 x 27			87
PWEX-H100-10	22000	10.0	10		30.52	31.4	115.7	9 x 27			4

DIMENSIONS (IN.) - PWEX H100 SPARK RESISTANT SERIES, HOOK MOUNT									
Capacity (lbs)	A	B	C	D	E	F	G	H	
1100	5.5	6.1	2.3	1.3	1.1	1.4	2.7	10.83	
2200	6.3	6.3	2.5	1.4	1.2	1.7	3.5	11.81	
4400	8.5	7.2	2.6	1.6	1.5	2.1	4.5	14.77	
6800	9.1	6.6	4.4	2.5	1.8	2.4	5.5	20.87	
11000	11.1	7.5	6.6	3.1	2.1	2.8	6.4	24.61	
22000	15.2	7.5	11.8	3.9	2.8	3.4	9	30.52	



### Detalles del Empaque

H Altura Muerta	20.87
J Boca Gancho	1.81

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso