



## **3 ton Electric Chain Hoist 1 Speed 208~240V / 440~480V 3ph 60HZ**


### **Características Esenciales**

- 3 Años de Garantía, Servicio y Atención al Cliente en Mexico

3 ton Electric Chain Hoist 1 Speed 208~240V / 440~480V 3ph 60HZ

## Especificaciones Técnicas

<b>Capacidad de Carga</b>	3 ton	<b>Velocidad /min</b>	21.25 ft @60Hz 5.40 mt @50Hz
<b>Numero de Velocidades</b>	1 Speed	<b>Voltaje</b>	3 Phase 208~240/440~480V 50/60Hz
<b>Potencia Total Watts</b>	3000	<b>Clase de Servicio</b>	H4/M5/2m/Class D
<b>Protección IEC Motor</b>	IP55	<b>Tipo Transmisión / Reductor</b>	Spur gearbox
<b>Tipo de Cadena</b>	G100 Nikel	<b>Dimensiones de la Cadena</b>	11.2 mm
<b>Caidas de Cadena</b>	1	<b>Longitud de cadena</b>	30
<b>Humedad</b>	20%~90%	<b>Temperatura</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Normas</b>	ASME HST-1 , ASME B30.16 , EN60204-35	<b>Hoist Contactors Amps</b>	25A
<b>Hoist Contactor Brand</b>	Schneider	<b>Hoist UL Components</b>	UL Listed Contactors
<b>Hoist Contactor Coil Voltage</b>	24 V	<b>IEC Hoist IP Protection</b>	IP55
<b>Pendant Control Yes No</b>	Yes	<b>IEC Pendant Control Protection</b>	IP66
<b>Pendant Control Emergency Stop</b>	Yes	<b>Pendant Control total Length</b>	27 ft
<b>Hoist Motor Power in KW</b>	3	<b>Hoist Motor Brake Type and DC Voltage</b>	DC99V/DC207V
<b>Overload Protection</b>	Overload Motor Clutch	<b>Hour Meter</b>	Internal Working Hour Meter
<b>Brake SKU</b>	PWRX-2-20-PN.60.61	<b>Brake rectifiers-half-wave</b>	PWRX-BKTF-HW
<b>Brake rectifiers-full-wave</b>	PWRX-BKTF-FW	<b>Hoist Motor Insulation Grade</b>	F
<b>Power Cord Length and Phase Order</b>	3 ft / Black L1 , Red L2 and Blue L3 Green ground	<b>Recommended Hoist Protection Circuit Breaker AMPS and Type</b>	Type D 25A at 220V and 20A at 460V
<b>Optional Load Chain Brand &amp; Country of Origin</b>	FEC Japan	<b>Reducer Lubrication Type</b>	Oil
<b>Paint Specifications</b>	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	<b>Standards Certified</b>	CE
<b>Load Chain weight per foot [lbs]</b>	1.83		

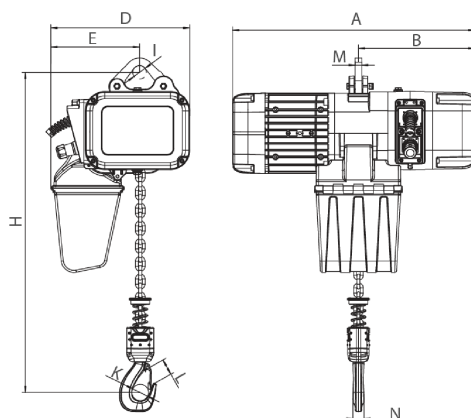

[Size list: mm]

Rated load (t)	Type	Minimum distance between hooks: H	A	B	D	E	I	M	N	K	L
1	PWRXF1-01	455	590	276	330	210	32	16	25	42	32
2	PWRXF2-01	550	590	276	330	210	38	20	35	52	42
3	PWRXF3-01	560	695	350	420	265	45	20	34	59	48
5	PWRXF5-02	675	695	350	420	307	55	28	44	60	48

## Peso & Dimensiones

**H Altura Muerta** 645

**A Altura Total** 560

**D Depth** 695

**W Ancho** 420

**J Boca Gancho** 59

**Peso Total (sin cable o cadena)** 130

**1st Package Type** Wood Crate

**Peso Total** 209 lbs / 95 Kg

## Detalles del Empaque

**Paquete 1 Peso Neto** 184.8 lbs / 84 Kg

**Paquete 1 Peso Bruto** 209 lbs / 95 Kg

**Paquete 1 Profundidad** 30 in / 77 cm

**Paquete 1 Ancho** 20 in / 51 cm

**Paquete 1 Altura** 31 in / 79 cm

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso