



## 3 ton Electric Chain Hoist w/ Power Trolley 1 Speed 208~240V / 440~480V 3ph 60HZ

### Características Esenciales


- 3 Años de Garantía, Servicio y Atención al Cliente en Mexico

## Especificaciones Técnicas

Plug	Open Leads	Capacidad de Carga	3 ton
Altura de Izaje Estandar (Customizable)	30 ft / 9 m	Velocidad /min	21.26 ft @60Hz 5.4 mt @50Hz
Numero de Velocidades	1 Speed	Voltaje	3 Phase 208~240/480V 50/60Hz
Clase de Servicio	H4/M5/2m/Class D	Protección IEC Motor	IP55
Control	Pendant Control IP66	Voltaje del Control	24V
Tipo Transmisión / Reductor	Spur gearbox	Tipo de Cadena	G100 Nickel
Dimensiones de la Cadena	11.2 mm	Caidas de Cadena	1
Longitud de cadena	30	Humedad	20%~90%
Temperatura	-4 ~ 104° F / -20 ~ 40° C	Potencia del Trolley	500
Velocidad del Trolley /min	43.30 ft @60Hz 11 mt @50Hz	Cantidad de Velocidades	1
Normas	ASME HST-1 , ASME B30.16 , B30.17	Garantía	3 Year
Hoist Contactors Amps	25A	Hoist Contactor Brand	Schneider
Hoist Contactor Model	LC1D25B7C	Hoist Contactor Coil Voltage	24 V
IEC Hoist IP Protection	IP55	Pendant Control Yes No	Yes
IEC Pendant Control Protection	IP66	Pendant Control Emergency Stop	Yes
Pendant Control total Length	27 ft	Hoist Motor Power in KW	3
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V	Overload Protection	Overload Motor Clutch
Hour Meter	Internal Working Hour Meter	Brake rectifiers-half-wave	PWRX-BKTF-HW

61000-6-2:2019, EN IEC  
 61000-6-4:2019, EN IEC  
 61000-3-2:2019+A2:2024, EN  
 61000-3-3:2013+A2:2021

<b>Trolley Motor Insulation Grade</b>	F	<b>Trolley Contactors Amps</b>	32A
<b>Trolley Contactors Brand</b>	Schneider	<b>Trolley Contactors Model</b>	LC1D12B7C
<b>Trolley Contactors Coil Voltage</b>	24 V	<b>Trolley Wheel Diameter</b>	124
<b>Trolley Wheel Material</b>	No. 45 steel	<b>Trolley Minimum Turn Radius</b>	1.6 m / 5.2 ft
<b>Trolley Beam Range</b>	3.9" to 7"	<b>Trolley Beam Extension Kit</b>	up to 12"
<b>Load Chain weight per foot [lbs]</b>	1.83	<b>1st Package Type</b>	Wood Crate
<b>2nd Package Type</b>	Wood Crate		

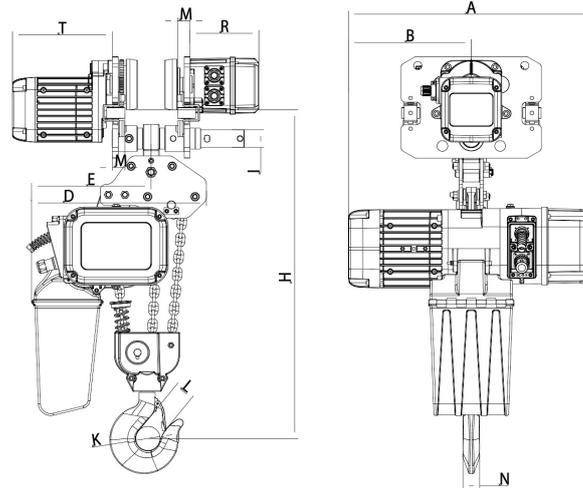

H	A	B	D	E	I	M	N	K	L	T	R
645	590	276	425	290	43	30	34	59	48	242	167

## Peso & Dimensiones

**Peso Total** 417 lbs / 190 Kg

## Detalles del Empaque

**H Altura Muerta** 25.39

**A Altura Total** 22.05

**D Depth** 27.36

**W Ancho** 16.54

**J Boca Gancho** 2.32

**Peso Total (sin cable o cadena)** 268.23

Referential Images / Imágenes Referenciales  
 Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso